

Customer: _____

Ship To: _____

Order No.: _____

Job No.: _____

Order Date: _____

Due Date: _____

Metallic Products

SLOPE MOUNT ROOF ACCESS HATCH
Shop Located, Shingle Type, Factory Installed
Ribs
MP-RH1


STANDARD FEATURES

1. 16 gauge galvalume steel shell and baseplate
2. Corners mitered and welded watertight
3. Curbs prime painted after fabrication
4. Positive hold-open device
5. Water diverting cricket
6. 6" minimum height on ridge side
7. 1½" – 3# density insulation when specified
8. Gas-charged opening device

ADDED OPTIONS

- 1.
- 2.
- 3.

MATCH ROOF PANEL _____

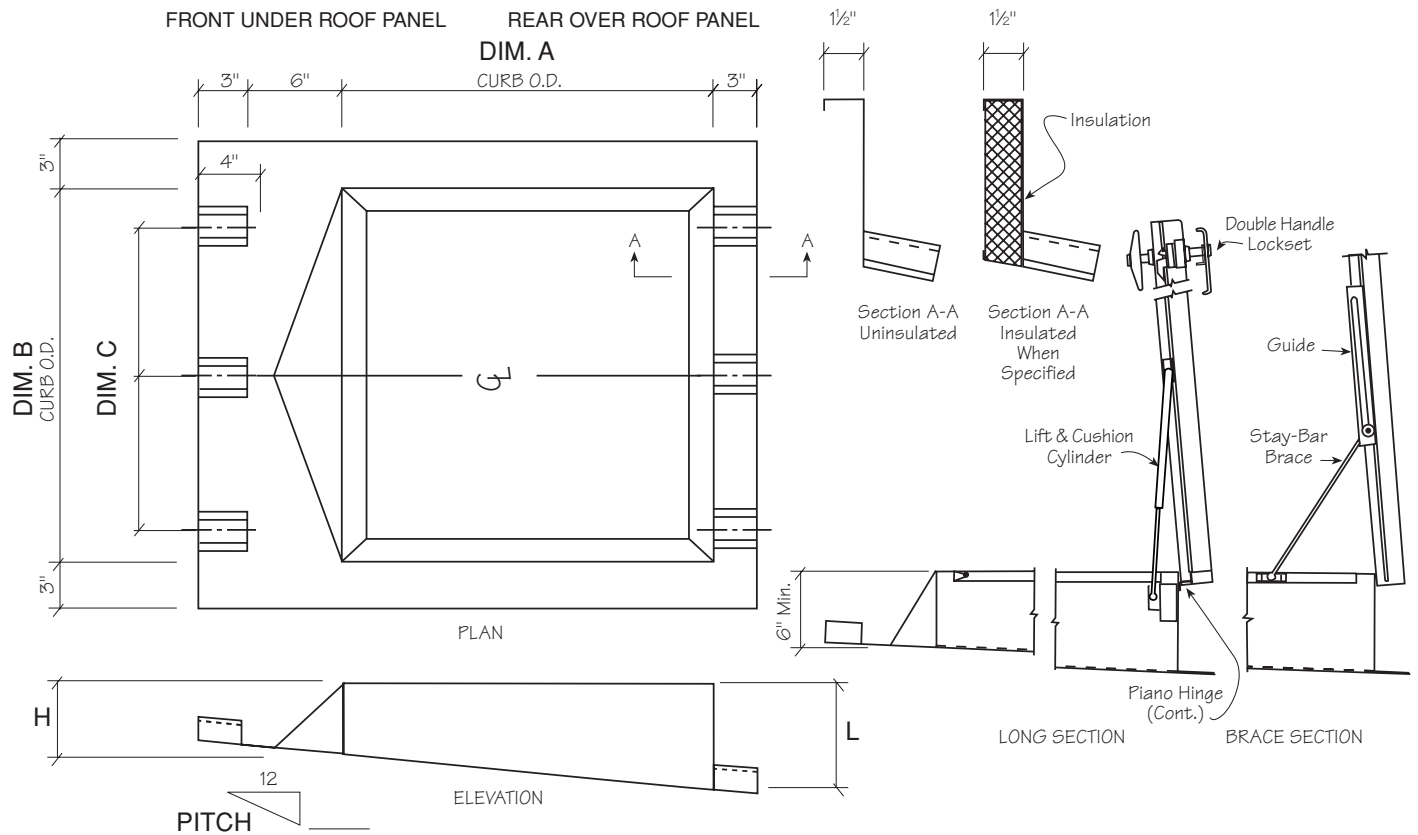

NO. REQ'D	DIM. A	DIM B	DIM C.	H	L	HINGE LOCATION*	TAG DESCRIPTION

* Hinge may be located on any side. Please indicate RIDGE, EAVE, LEFT or RIGHT.

