

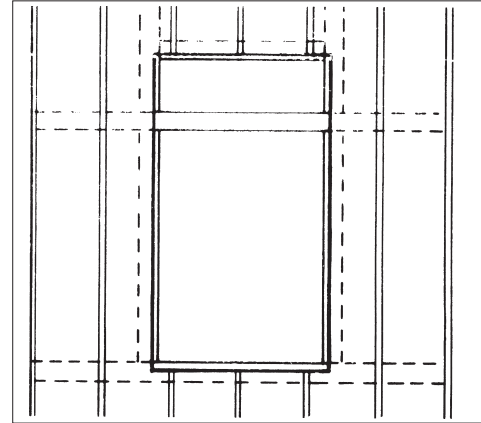
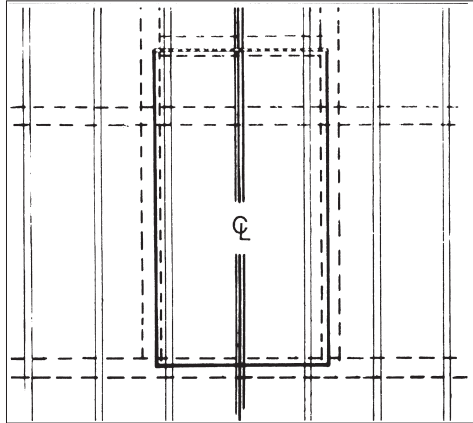


➤ MP-RC4 FOR INSTALLATION OVER ROOF PANELS

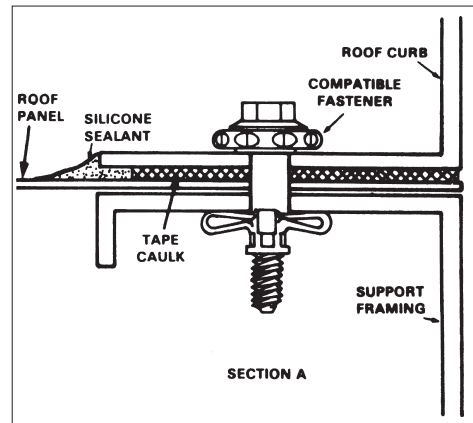

- A**
1. On fully sheeted roof, locate and mark center line of roof opening.
 2. Using distance from center line to major ribs as guide, layout and mark roof opening to curb outside dimensions.

- B**
3. Cut out roof opening to O.D. of curb, plus an additional 6" of the major ribs on the ridge side of the opening to allow the curb's water diverter area to seal to flat of roof deck.
 4. Install structural support framing for roof curb and equipment loads beneath roof curb walls and flanges around opening. Keep I.D. clear.

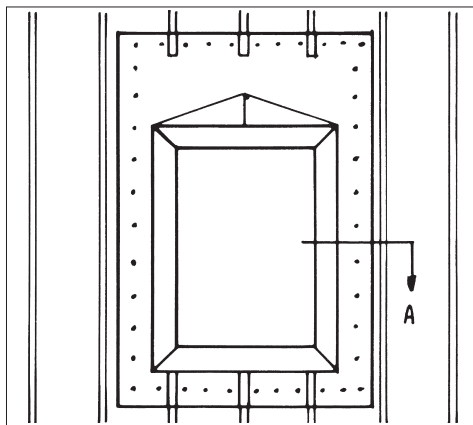

- C**
5. Turn roof curb upside down and apply tape caulk to curb flanges.
 6. Press the curb in place on the roof deck. Fasten curb to support steel through curb flange and roof deck using suitable fasteners compatible with roof system. A minimum of four fasteners per side spaced on 3" centers or less as roof system permits. Fasteners should withstand a minimum pullout force of 150# each.

- D**
7. Seal edge of roof curb flange with silicone caulk to assure watertight weather seal.
 8. Apply a closed cell neoprene strip to top rail of roof curb before setting a rooftop unit. Equipment should be fastened directly to curb wall using compatible fasteners.