

ROUND GRAVITY VENTILATORS

Don't settle for bad airflow. Outsmart stagnant air with round gravity roof ventilators. This versatile product is designed for economic, low volume air movement to ventilate warehouses, light industrial buildings, attics, lofts and other buildings requiring gravity or relief ventilation. The volume of gravity air movement can be controlled by the adjustable damper.



SPECIFICATIONS

STANDARD SIZE

Standard round gravity ventilators are available in 12", 20", and 24" diameter throat sizes. Other sizes up to 48" available through special orders.

INTEGRAL DAMPERS

The damper is supported in the open position by four strong springs and is closed by a 5' long pull chain. Longer lengths available on request. Damper may be locked in any position.

CONSTRUCTION

26-gauge inner and outer bands, rain shield and base are assembled with four preformed baffles into a simple yet sturdy ventilating unit. This design achieves a free, unobstructed flow of ventilated air.

BIRD SCREEN

Assembly is completed by the installation of a 4 x 4 bird screen in the opening between the inner band and the rain shield to resist the entry of birds into the vent area.

FINISH

Galvalume finish is standard. Polar White and other color options are available including Kynar®.


BASE DESIGN

The base is specifically designed for final installation with a specified roof slope: ridge or single slope, and flat or mounted into specified roof panel. Base and ventilating unit are furnished preassembled, ready for installation. Single slope bases are mounted directly into roof panel and are placed in such a way as to prevent damming.

NOTE

When ordering, please specify roof slope, base type, damper pull chain and paint color.


BASE TYPES

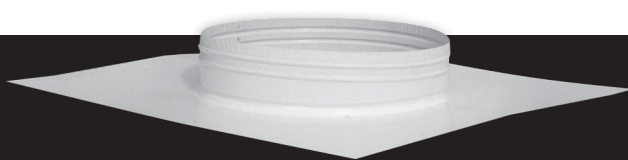


TYPE 1



TYPE 2

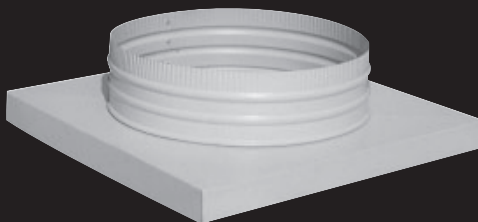

TYPE 3

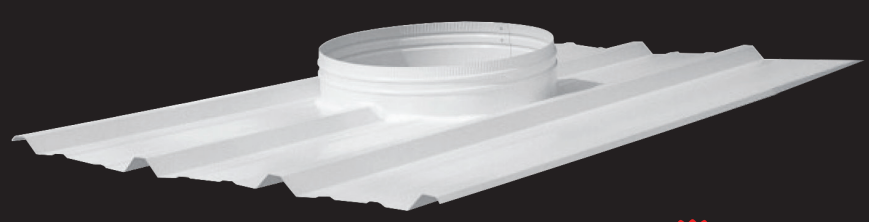


TYPE 4

DIMENSIONS & SHIPPING WEIGHT


THROAT*	W	H	TH	SHIPPING WEIGHT (lbs.)
12"	18"	7-1/2"	14-1/2"	90
20"	30"	10"	17-1/2"	110
24"	36"	12"	23-1/2"	120

*Other throat sizes available upon request.

TECHNICAL SPECIFICATIONS

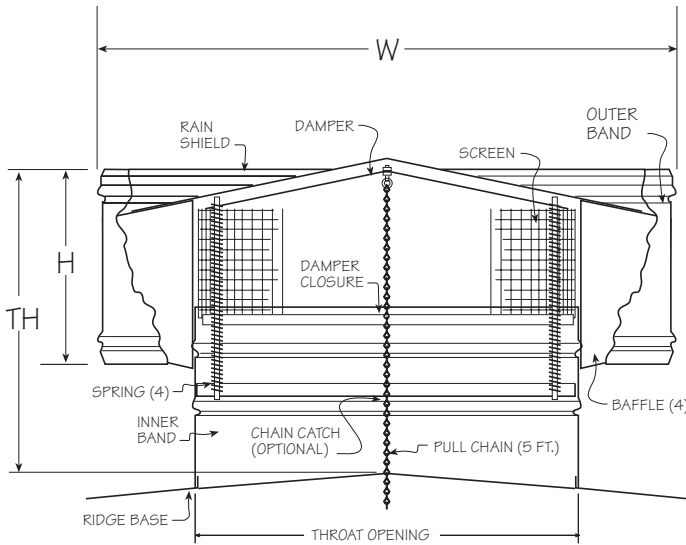

12, 16, 24, 36 and 48" Throat Ventilators

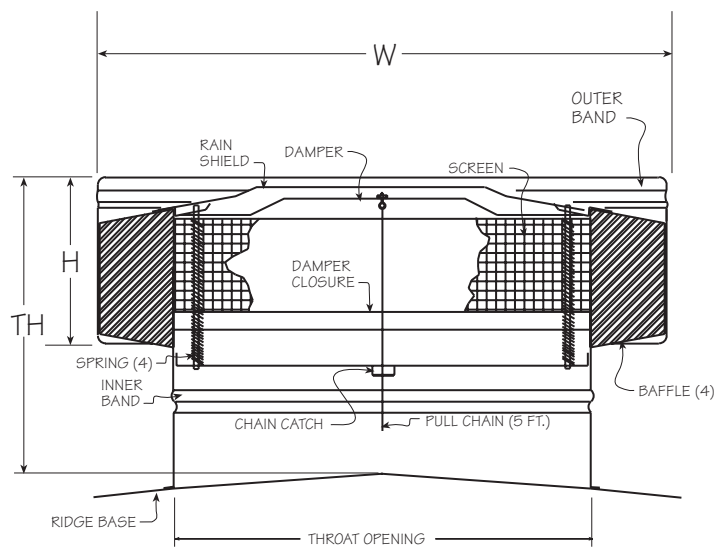

20" Throat Ventilators



TABLE OF CAPACITIES FOR ROUND VENTILATORS

CAPACITY:

Determine the height of vent above the air intakes and the "Temperature Difference" between inlet air temperature and outlet air temperature with these two constants find the "Factor" from Table "A." Multiply base rate C.F.M. from "Table C" by the factor from "Table A." The result is approximate vent capacity at "0" M.P.H. outside wind velocity. Beside the factor in Table A is the letter A, B, C or D. This letter refers to a factor in Table "B." Multiply vent capacity for "0" M.P.H. wind by appropriate factor from Table "B" for vent capacity under the given wind condition.

TABLE A

TEMPERATURE-HEIGHT FACTORS							
HEIGHT	TEMPERATURE DIFFERENCE						
	15°	20°	25°	30°	35°	40°	50°
15'	.64A	.78A	.84A	.90B	.96B	1.02B	1.10C
20'	.76A	.86A	.93B	1.00B	1.07B	1.13C	1.22C
25'	.84A	.95B	1.02B	1.10C	1.18C	1.25C	1.34C
30'	.91B	1.03B	1.12C	1.20C	1.29C	1.36C	1.47D
35'	.97B	1.09B	1.18C	1.27C	1.36C	1.430	1.55D
40'	1.02B	1.15C	1.25C	1.34C	1.430	1.52D	1.64D
45'	1.07B	1.20C	1.30C	1.40C	1.50D	1.58D	1.71D
50'	1.11C	1.26C	1.36C	1.46D	1.56D	1.65D	1.78D

TABLE B

WIND VELOCITY FACTORS				
WIND M.P.H.	FACTORS			
	A	B	C	D
3	1.14	1.09	1.05	1.02
5	1.25	1.18	1.13	1.09
7	1.41	1.29	1.22	1.16
9	1.62	1.43	1.33	1.25
11	1.82	1.57	1.43	1.32

TABLE C

BASE RATINGS PER UNIT	
SIZE	C.F.M.
12"	256
18"	577
20"	712
24"	1026

