



ALUMINUM ADJUSTABLE STORMPROOF BLADE LOUVER

STANDARD FEATURES

- .080 aluminum frame, 4" nominal depth
- Extruded aluminum .080 J-type blade, 45° angle
- Aluminum screen cloth installed in an extruded removable, rewireable aluminum frame
- Mill finish
- Architecturally styled, all aluminum construction for low maintenance and high resistance to corrosion

OPTIONS


Changes to the base design of this louver are available at an additional cost, including:

- Extended sill
- A variety of bird or insect screens
- Powder coated finish
- Mullions, if needed (not for A Panel or R Panel types)


NOTE

Minimum size is 24"x24"




CENTER PIVOT ALUM STORMPROOF BLADE

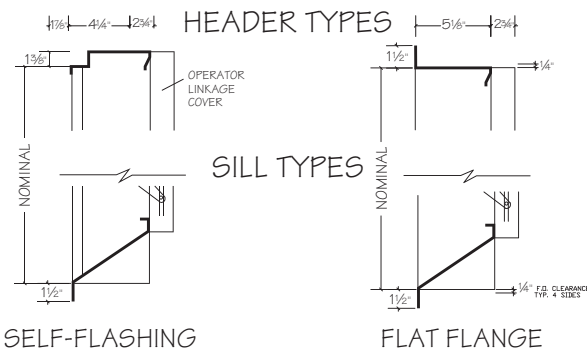

CENTER PIVOT STORMPROOF BOX TYPE








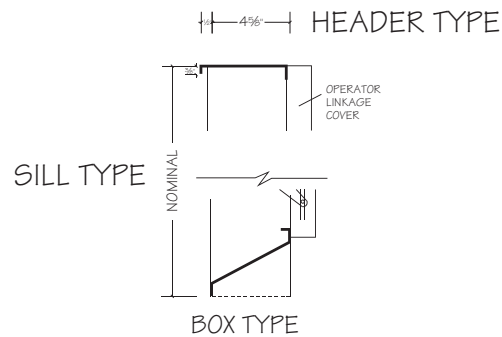


JAMB TYPES

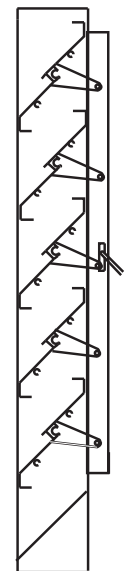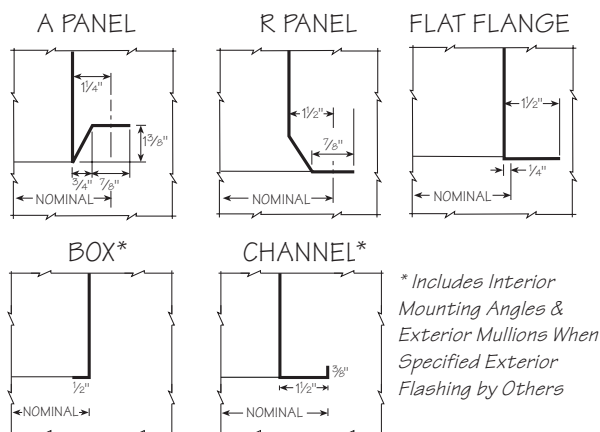

LOUVER INSTALLATION INSTRUCTIONS

➤ T2 (R PANEL) LOUVER

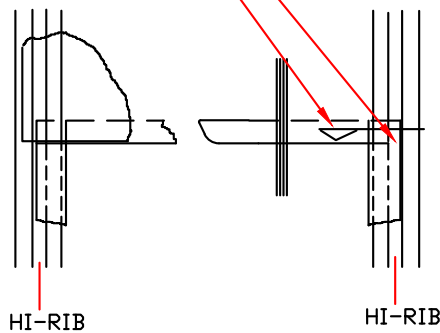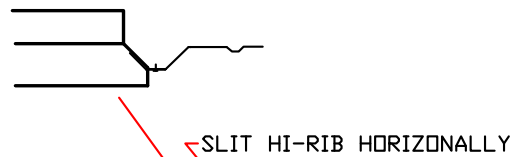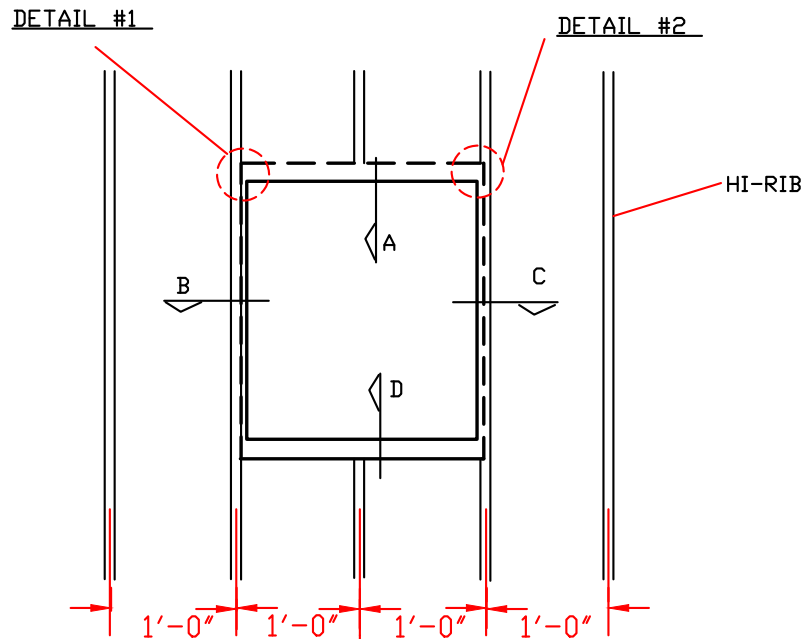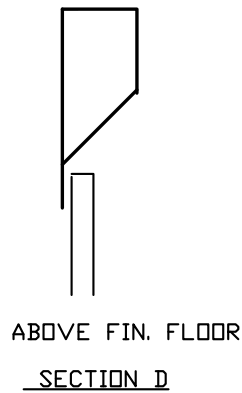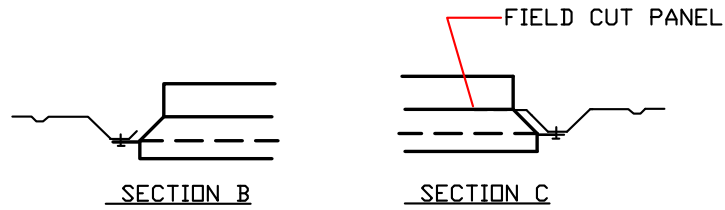

DETAIL #1
PANEL SIDE-LAP
CONDITION

DETAIL #2
INTERMEDIATE HI-RIB
CONDITION REQUIRES SLIT.

LOUVER INSTALLATION INSTRUCTIONS

➤ T3 (FLAT FLANGE) LOUVER

